iXM-SP150

Taking Space imaging to new heights





An advanced 150 megapixels snapshot matrix camera for Earth Observation and Space Domain Awareness applications

The Phase One iXM-SP150 is a 150 megapixels (MP) snapshot matrix camera for high-demand Earth Observation and Space Domain Awareness applications. Its snapshot matrix imaging technology provides high photogrammetric precision, eliminating errors associated with line TDI scanning cameras. It is specifically engineered to endure the harsh conditions of Low Earth Orbit, providing high resolution, sensitivity, and noise reduction for multispectral, panchromatic and color imaging applications.

The iXM-SP150 camera utilizes Phase One's trusted iXM architecture, which has been demonstrated to be highly reliable, rigid, and efficient through the successful operation of thousands of cameras since 2018. This architecture has been utilized in a variety of aerial imaging applications and in a wide range of environmental conditions. The iXM-SP150 has been designed and constructed space radiation hardened and with fiber optic 10G Ethernet interface. It is ready for integration with space telescopes and satellite buses.



Phase One iXM-SP150



Collect more data in every frame with our 150 MP, snapshot matrix camera

Unlock the power of seamless image capture with our technology, allowing you to effortlessly capture large area images with pixel-perfect precision. Thanks to the small pixel size of our sensors our design allows for the use of smaller and more cost-effective components, such as compact telescopic lenses, to achieve the same high-quality imaging results. By eliminating precision errors associated with line TDI scanners, you can ensure maximum accuracy and efficiency in your data collection.

With the ability to capture multiple images of the same large area and achieve full motion video at a 4 fps capture rate, our technology significantly increases the signal-to-noise ratio and overall image quality for a truly immersive imaging experience.



Proven for use in Low Farth Orbit

iXM-SP150 was originally designed for space, incorporating system redundancy and containing radiation hardened electronic components. An early unit has been operating in space since mid-2022, proving its high quality Earth Observation imaging capabilities, reliability and durability in Low Earth Orbit.



Straight forward integration with satellite hardware

Phase One's space-hardened enclosure combines a sensor and imaging engine, optional sensor alignment with space telescopes. With a fiber optic 10G Ethernet data interface, you can ensure high speed and reliable data transfer for your space applications.

iXM-SP150

Technical specifications

Imaging specifications

Resolution (pixels)	14,204 x 10,652		
Pixel size (μm)	3.76		
Pixel depth (bit)	16, 14, 12		
Color variants	Achromatic, Bayer color		
Full well capacity (e-)	50,000		
Read noise (e-)	3.4		
Dark current	1.2 e-/s @ 40°C		
Region of interest	Definable		
Binning option	2x2 in digital domain (37.7 MP)		
Integration time	250 μs to 1s		
Telescope mount	Customizable		

System specifications


Compression	Lossless (~1 B/ pixel), Smart (~0.7 B/ pixel)	
Metadata	In image	
Interface	Optical Ethernet 10G	
Image buffer size (MB)	1,500	
Image transfer rate to host (MB/s)	500	
Hardware signals	Trigger input, camera ready output	
Camera control interface	Proprietary over camera SDK, provided	
Camera states	Ready, armed, busy	
Power supply	15 V DC	
Max. power consumption (W)	20	
Mass (g)	865	
Dimensions (mm)	100 x 100 x 67	
Thermal interface	Rear plate	

Phase One iXM-SP150

iXM-SP150

Technical specifications

Environmental specifications	Operating temperature range		-10°C to +50°C (on rear plate)		
	Survival temperature range		-30°C to +65°C (on rear plate)		
Technology readiness	2020	2021	2022	2023	2024
	TRL 5	TRL 6	TRL 7	TRL 8	TRL 9

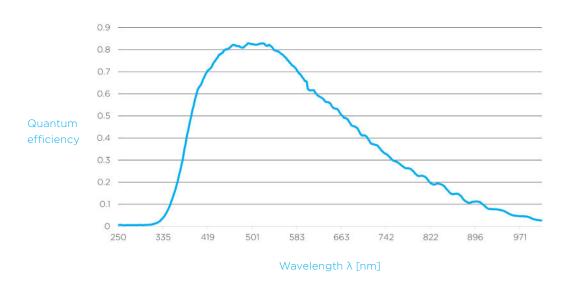

iXM-SP150

Additional benefits and features



Geotagged images



Camera control and image processing SDK



Ready for remote update




Lightweight and compact



Low power consumption



Redundant operating system

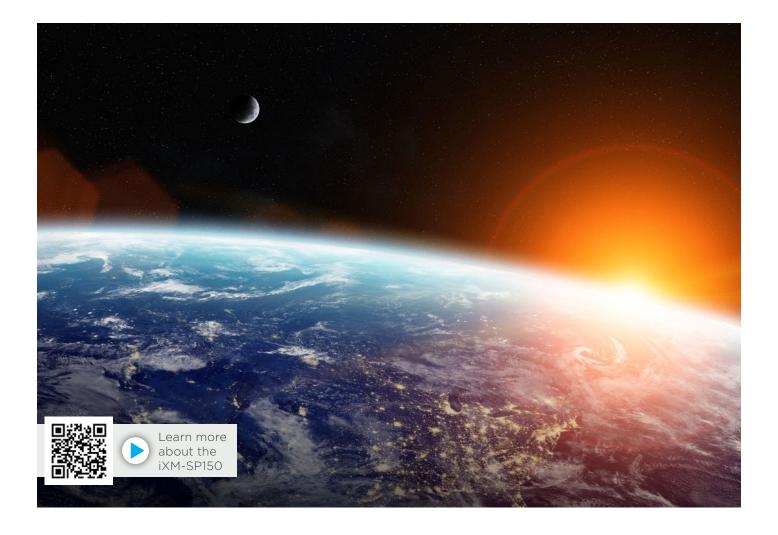

About Phase One

Phase One A/S is a leading researcher, developer and manufacturer of medium format and large format digital cameras, software, and imaging solutions.

Founded in 1994, Phase One is a pioneer of digital photography and has developed core imaging technologies and a range of digital cameras and imaging modules. Phase One provides the world's highest image quality in terms of resolution, dynamic range, color fidelity and geometric accuracy. As such, the company has grown to become the leading provider of high-end imaging technology across many business segments. This includes both hardware and software for aerial mapping, industrial inspection, and cultural heritage digitization, as well as serving the world's most demanding photographers.

Phase One A/S

Roskildevej 39 DK-2000 Frederiksberg Denmark

Tel.: +45 36 46 0111 Fax: +45 36 46 0222

Phase One USA

Rocky Mountain Metropolitan Airport 11755 Airport Way, Suite 216 Broomfield, CO 80021

Tel.: +1 (303) 469-6657

Phase One Germany

Lichtstr. 43h 50825 Köln Germany

Tel.: +49 (0)221/5402260 Fax: +49 (0)221/54022622

Phase One Japan Co., Ltd.

Igarashi Building, 4F 3-16 Kandanishiki-cho Chiyoda-ku, Tokyo 101-0054, Japan Tel: +81-3-6380-2506 Fax: +81-3-6380-2507

Phase One Asia Pacific

Unit 503, 5/F., Times Tower No. 928-930 Cheung Sha Wan Road, Lai Chi Kok, Kowloon, Hong Kong Tel.: + 852 28967088 Fax: + 852 28981628









